

Rev 1.3  
19.01.2016

## Portable Signal Generators BPSG Series

World's smallest, battery powered Signal Generator from 23,5MHz to 6GHz



### Highlights

- ◆ Frequency range: 23,5MHz to 6GHz
- ◆ Incl. intuitive PC control software
- ◆ Battery powered or via Power Supply
- ◆ Extremely compact and portable
- ◆ High output power up to +18dBm
- ◆ Up to 65dB dynamic range
- ◆ Onboard TCXO for high frequency accuracy
- ◆ Connector for external reference clock
- ◆ **10 years warranty**



Made in Germany



# Details

## Highest performance in the smallest space

Aaronia presents the new, battery-powered signal Generators of the BPSG series. The BPSG generators allow to generate RF signals, tests of EMC-Shielding and EMI/RFI testing.

Available in 4 different versions the Generators cover a frequency range from 23,5MHz up to 6GHz.

With the very compact dimensions of just 80x50x30 mm and weighing only 150 grams, the BPSG series is predestined for mobile use and fits in every pocket. The compact form factor makes the BPSG the world's smallest battery-powered RF generator up to 6GHz.



Scope of delivery: transport case, international 12V power supply, USB Cable, SMA/SMA (f/f) Adapter, SMA Tool, PC Software, Calibration data



Frontside



Backside



OEM Version

Many Aaronia antennas can be transformed into an active field strength generator in combination with the BPSG in a few simple steps. In standalone mode, the generator can produce simple or very complex batch programs that automatically start after power up. This allows to create a fixed frequency and level or the start of a pre-defined Sweep, complex frequency lists, modulation, etc.

With a maximum output of + 18dBm and a Dynamic range of up to 65dB the BPSG sets new standards for battery-powered signal generators. Thanks to the internal TCXO Time base the BPSG generates stable and accurate RF frequencies up to 6GHz.

The BPSG can also be connected to an external reference clock and thus be synchronized with a measuring system. In addition, this way even higher accuracy can be achieved (Using an OCXO, Rubidium timebase etc.).



The BPSG as Field-Strength-Generator up to 3V/m (1m distance), available as „DFG 4060“


# Technical data

## BPSG 4

- ◆ Frequency range: **35MHz to 4,4GHz**
- ◆ Highest Output Level: **+ 17dBm**, adjustable in 0.5dB Steps
- ◆ Smallest output level: **-48dBm**
- ◆ Accuracy: +/-1dB
- ◆ Up to 65dB dynamic range (55dB within +/- 1dB)
- ◆ Frequency accuracy: 15Hz (<100MHz), 150Hz (<1GHz), 600Hz (<4GHz)
- ◆ 1Hz Phase Noise of -99dBc (1kHz @ 500MHz)
- ◆ Modulations: AM, FM, PM
- ◆ Onboard TCXO for High Frequency Accuracy
- ◆ Connectivity to external reference clock for System synchronization via SMA connector (female)
- ◆ Onboard CPU / memory for intelligent self-running profiles
- ◆ Stand-alone operation (no PC/USB connection required)
- ◆ Battery operation up to 4 hours.
- ◆ USB port for real-time PC control or storage of programs
- ◆ Interface: USB 2.0 / 1.1
- ◆ Incl. Carrying case, 12V International charger with adapters, USB cable, SMA Adapter (f/f), SMA Tool and PC software
- ◆ Weight: 150gr with battery
- ◆ Dimensions (L / B / H): 81x61x29mm
- ◆ **Warranty: 10 years**

## BPSG 4 OEM

- ◆ Identical to BPSG 4, but with special OEM housing with screw holes for easy installation in existing systems/housings incl. 2 screwable brackets (90°)

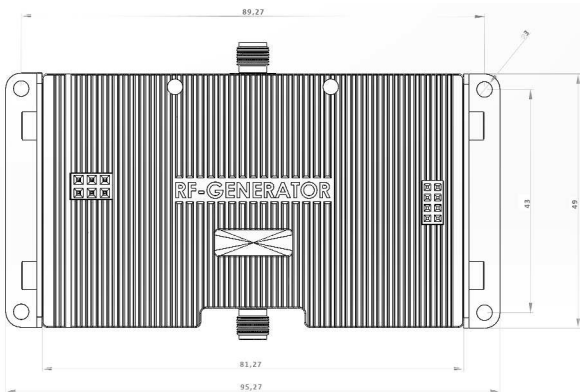

Front view BPSG OEM Versions

Carrier Frequency	Offset from carrier			
	1kHz [dBc/Hz]	10kHz [dBc/Hz]	100kHz [dBc/Hz]	1MHz [dBc/Hz]
0.5 GHz	-99	-101	-103	-123
1 GHz	-90	-92	-97	-119
2 GHz	-85	-88	-91	-114
3 GHz	-82	-85	-87	-109
4 GHz	-81	-81	-86	-106
4.4 GHz	-80	-81	-80	-105


Phase Noise BPSG 4 and BPSG 4 OEM

## BPSG 6

- ◆ Frequency range: **23,5MHz to 6GHz**
- ◆ Highest Output Level: **+ 18dBm**, adjustable in 0.5dB Steps
- ◆ Smallest output level: **-45dBm**
- ◆ Accuracy: +/- 1dB
- ◆ Up to 63dB dynamic range (55dB within +/- 1dB)
- ◆ Frequency accuracy: 15Hz (<100MHz), 150Hz (<1GHz), 450Hz (<3GHz), 900Hz (<6GHz)
- ◆ 1Hz Phase Noise: -98dBc (1kHz @ 500MHz)
- ◆ Modulations: AM, FM, PM
- ◆ Onboard TCXO for High Frequency Accuracy
- ◆ Connectivity to external reference clock for System synchronization via SMA connector (female)
- ◆ Onboard CPU / memory for intelligent self-running profiles
- ◆ Stand-alone operation (no PC/USB connection required)
- ◆ Battery operation up to 4 hours
- ◆ USB port for real-time PC control or storage of programs
- ◆ Interface: USB 2.0 / 1.1
- ◆ Incl. Carrying case, 12V International charger with adapters, USB cable, SMA Adapter (f/f), SMA Tool and PC software
- ◆ Weight: 150gr with battery
- ◆ Dimensions (L / B / H): 81x61x29mm
- ◆ **Warranty: 10 years**

## BPSG 6 OEM

- ◆ Identical to BPSG 6, but with special OEM housing with screw holes for easy installation in existing systems/housings incl. 2 screwable brackets (90°)

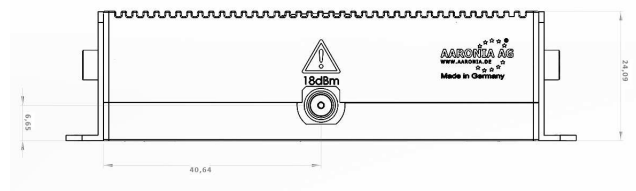

Side view BPSG OEM Versions

Carrier Frequency	Offset from carrier			
	1kHz [dBc/Hz]	10kHz [dBc/Hz]	100kHz [dBc/Hz]	1MHz [dBc/Hz]
0.5 GHz	-98	-95	-115	-128
1 GHz	-91	-91	-111	-127
2 GHz	-88	-85	-105	-128
3 GHz	-86	-86	-100	-125
4 GHz	-81	-79	-99	-123
5 GHz	-79	-77	-97	-121
6 GHz	-75	-73	-93	-118

Phase Noise BPSG 6 and BPSG6 OEM

# References

## Cross-Section of Aeronia Clients

### Government, Military, Aeronautic, Astronautic

- ◆ NATO, Belgium
- ◆ Department of Defense, USA
- ◆ Department of Defense, Australia
- ◆ Airbus, Germany
- ◆ Boeing, USA
- ◆ Bundeswehr, Germany
- ◆ NASA, USA
- ◆ Lockheed Martin, USA
- ◆ Lufthansa, Germany
- ◆ DLR, Germany
- ◆ Eurocontrol, Belgium
- ◆ EADS, Germany
- ◆ DEA, USA
- ◆ FBI, USA
- ◆ BKA, Germany
- ◆ Federal Police, Germany
- ◆ Ministry of Defense, Netherlands

### Research/Development, Science and Universities

- ◆ MIT - Physics Department, USA
- ◆ California State University, USA
- ◆ Indonesien Institute of Science, Indonesia
- ◆ Los Alamos National Laboratory, USA
- ◆ University of Bahrain, Bahrain
- ◆ University of Florida, USA
- ◆ University of Victoria, Canada
- ◆ University of Newcastle, United Kingdom
- ◆ University of Durham, United Kingdom
- ◆ University of Strasbourg, France
- ◆ University of Sydney, Australia
- ◆ University of Athen, Greece
- ◆ University of Munich, Germany
- ◆ Technical University of Hamburg, Germany
- ◆ Max-Planck Institute for Radio Astronomy, Germany
- ◆ Max-Planck Institute for Quantum Optics, Germany
- ◆ Max-Planck-Institute for Nuclear Physics, Germany
- ◆ Max-Planck-Institute for Iron Research, Germany
- ◆ Research Centre Karlsruhe, Germany

### Industry

- ◆ APPLE, USA
- ◆ IBM, Switzerland
- ◆ Intel, Germany
- ◆ Shell Oil Company, USA
- ◆ ATI, USA
- ◆ Microsoft, USA
- ◆ Motorola, Brazil
- ◆ Audi, Germany
- ◆ BMW, Germany
- ◆ Daimler, Germany
- ◆ Volkswagen, Germany
- ◆ BASF, Germany
- ◆ Siemens AG, Germany
- ◆ Rohde & Schwarz, Germany
- ◆ Infineon, Austria
- ◆ Philips, Germany
- ◆ ThyssenKrupp, Germany
- ◆ EnBW, Germany
- ◆ RTL Television, Germany
- ◆ Pro Sieben – SAT 1, Germany
- ◆ Channel 6, United Kingdom
- ◆ CNN, USA
- ◆ Duracell, USA
- ◆ German Telekom, Germany
- ◆ Bank of Canada, Canada
- ◆ NBC News, USA
- ◆ Sony, Germany
- ◆ Anritsu, Germany
- ◆ Hewlett Packard, Germany
- ◆ Robert Bosch, Germany
- ◆ Mercedes Benz, Austria
- ◆ Osram, Germany
- ◆ DEKRA, Germany
- ◆ AMD, Germany
- ◆ Keysight, China
- ◆ Infineon Technologies, Germany
- ◆ Philips Semiconductors, Germany
- ◆ Hyundai Europe, Germany
- ◆ JDSU, Korea
- ◆ Wilkinson Sword, Germany
- ◆ IBM Deutschland, Germany
- ◆ Nokia-Siemens Networks, Germany

# Aaronia Distributors



## USA

**Aaronia USA**, 651 Amberton Crossing  
Suwanee, Georgia 30024 USA  
Phone: +1 678 714 2058  
Fax: +1 678 714 2092  
Email: sales@aaroniausa.com  
URL: www.aaroniaUSA.com



## China

**Aaronia China**, 3BRM, RD FL Luhua Technology Bldg,  
Guangxia Road 7, Futian, 518049 Shenzhen, China  
Phone: +86 755 888 580 86  
Fax: +86 755 830 73 418  
Email: mail@aaronia-china.com  
URL: www.aaronia-china.com



## Russia

**Testpribor**  
Fabriciusa St. 30 Moscow 125363 Russia  
Phone: +7 495 225 67 37  
Fax: +7 495 657 87 37  
Email: testpribor@test-expert.ru  
URL: www.test-expert.ru



## India

**Aimil Ltd**, B-906, BSEL Tech Park, Opp. Vashi  
Rly Stn, 400705 Vashi, Navi Mumbai, India  
Phone: +91 22 3918 3554  
Fax: +91 22 3918 3562  
Email: narayanedke@aimil.com  
URL: www.aimil.com



## Greece

**VECTOR Technologies Ltd**  
40 Diogenous str., 15234 Halandri, Greece  
Phone: +30 210 685 8008  
Fax: +30 210 6858 8118  
Email: info@vectortechnologies.gr  
URL: www.vectortechnologies.gr



## Turkey

**EgeRate Elektronik Muh. ve Tic. Ltd. Sti** Perpa Ticaret  
Merkezi, A Blok Kat: 5 No: 141, Sisli / Istanbul, Turkey  
Phone: +90 212 220 3483  
Fax: +90 212 220 7635  
Email: info@egerate.com  
URL: www.egerate-store.com



## Taiwan

**E-Instrument Tech Ltd.**, No. 16, Lane 37  
Guanye E. Riad, Pingchen City,  
324587 Taoyuan County, Taiwan  
Phone: +886 3 4576 809  
Fax: +886 3 468 8611  
Email: sales@e-channel.com.tw  
URL: www.e-channel.com.tw



## Argentina

**EKKON SA**, Paraná 350, Capital Federal,  
1017 Buenos Aires, Argentina  
Phone: + 54 114 123 009 1  
Fax: +54 114 372 324 4  
Email: info@aaronia-argentina.com.ar  
URL: www.aaronia-argentina.com.ar



## Israel

**Mono Tech Ltd**,  
2 Johanan Hasandlar St. 44641 Kfar-Sava, Israel  
Phone: +972 72 2500 290  
Fax: +972 9 7654 264  
Email: kobi@aaronia.co.il  
URL: www.aaronia.co.il



## Serbia

**Tagor Electronic doo**  
Tihomira Brankovica 21,  
18000 Nis, Serbia  
Phone: +381 18 575 545  
Fax: +381 18 217 125  
Email: miodrag.stojilkovic@tagor.rs  
URL: www.tagor-instrumenti.rs



## Iran

**International Rayan Nik**  
Unit 1, No. 25, Nahal Alley, Kanoon St., Kashani  
Ave, P.O.Box 14875-148, Tehran, Iran  
Phone: +98 21 4433 8882  
Fax: +98 21 4433 8883  
Email: info@rayannik.com  
URL: www.rayannik.com



Made in Germany

Aaronia AG, Gewerbegebiet Aaronia AG, DE-54597 Strickscheid, Germany  
Phone ++49(0)6556-93033, Fax ++49(0)6556-93034  
Email: mail@aaronia.de URL: www.aaronia.com

Spectran®

HyperLOG®

BicoLOG®

OmniLOG®

Aaronia-Shield®

Aaronia X-Dream®

MagnoShield®

IsoLOG®

are registered trademarks of Aaronia AG